


ESSTEE

HYDRAULIC DAMPING CYLINDER

DC 24 - DC 31 SERIES

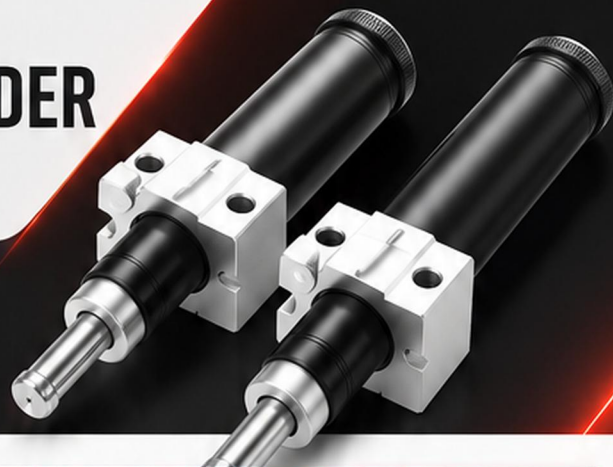

FULL LOAD
ZERO MOVEMENT




PRECISE
DAMPING



SMOOTH &
RELIABLE





WIDE LOAD
RANGE

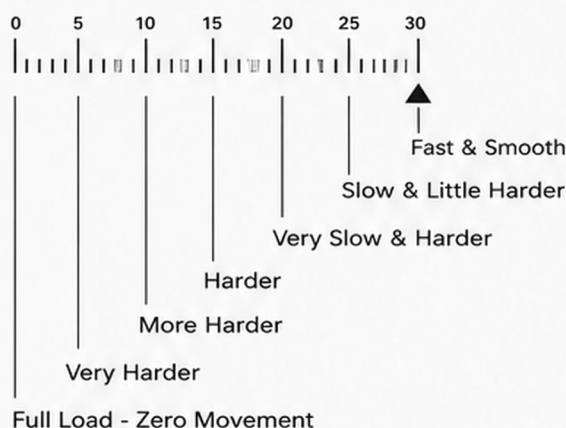

MODEL No.	STROKE mm	LOAD RANGE	SPEED RANGE
DC 2415	15	50 - 300 Kgf	0.3 to 50 mm / sec
DC 2430	30		
DC 2460	60		
DC 2480	80		
DC 24100	100		
DC 3140	40	100 - 550 Kgf	0.2 to 40 mm / sec
DC 3160	60		
DC 31100	100		

Operating Temp. :- Max 80 deg C

Note :- Special models available on request.

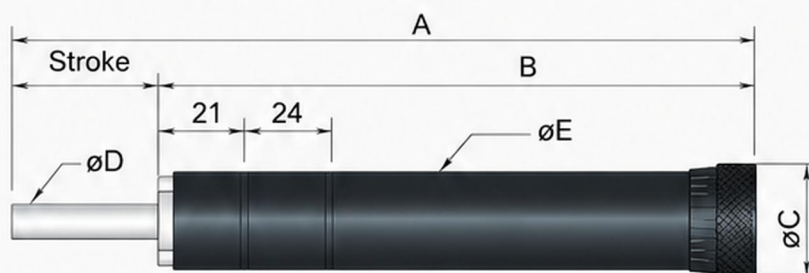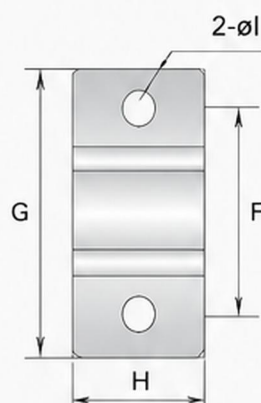


Model	Stroke	A	B	C	D	E	F	G	H	I
DC2415	15	159	144	28	9	24	37	52	28	5.8
DC2430	30	207	177							
DC2460	60	279	218							
DC2480	80	343	263							
DC24100	100	399	299							
DC3140	40	270	230	36	12	31	44	60	42	6.5
DC3160	60	325	265							
DC31100	100	405	305							

All dimensions are in mm. / Dimensional Deviation :- +/- 0.2mm

Updated as on Dec25

Note :- Due to continuous development - there maybe some dimensional variations.


APPLICATIONS OF HYDRAULIC DAMPING CYLINDER




INDUSTRIAL AUTOMATION



MATERIAL HANDLING



MACHINE TOOLS



PRESS & EQUIPMENT

SHREE SAI TECH

25-1, Raja Annamalai Road, New Nesavalar Colony,
Saibabacolony, Coimbatore-641011, Tamil Nadu, India
Ph. No. : +91-6385584152 | E-Mail: sstcbe22@gmail.com | www.shreesaitech.in

